
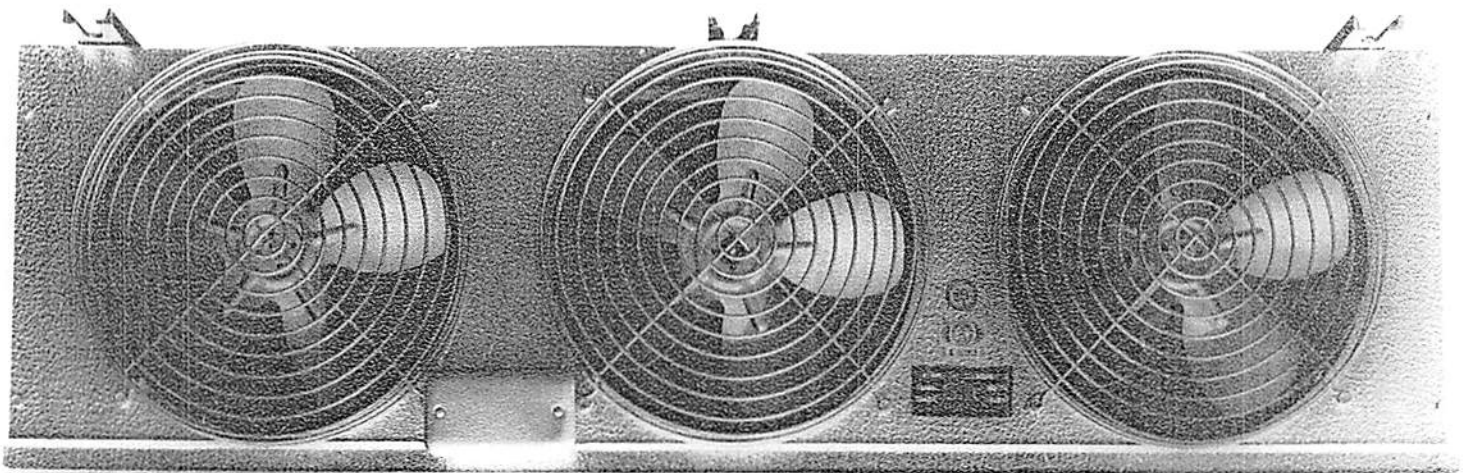


# Slim Line Electric Defrost Coils

LOW TEMPERATURE APPLICATIONS BELOW 32°F—R-12—R-22

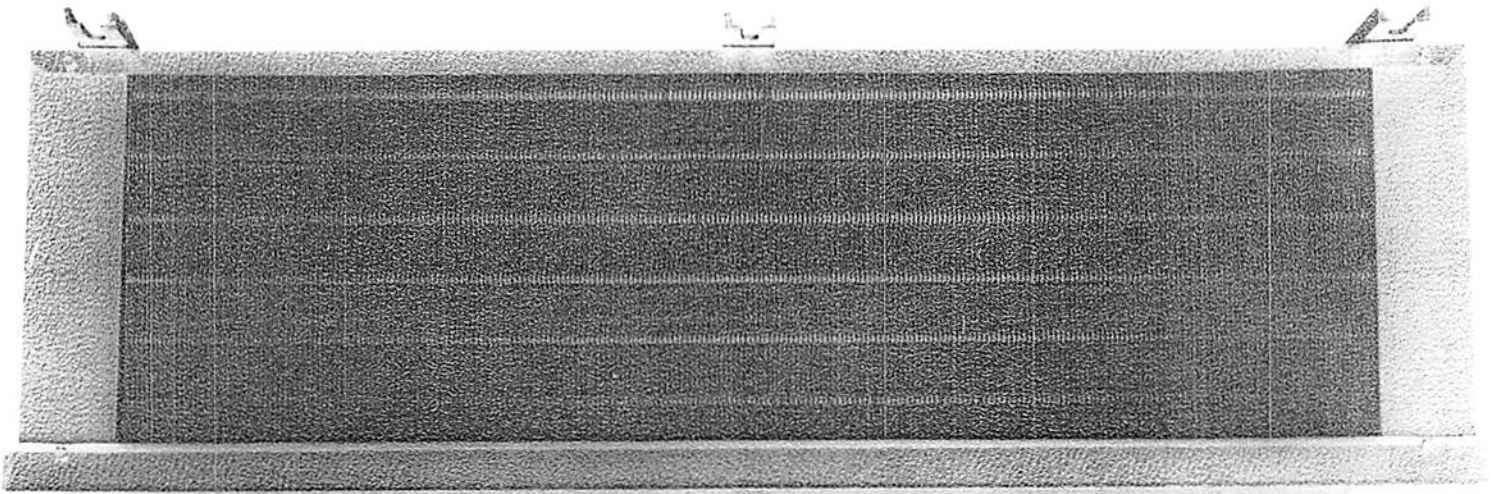

- ★ Stucco Aluminum Housing.
- ★ Heavy Duty Motors with overload protection.
- ★ Staggered Tube Pattern for better operation.

L. R. Corporation [Lanphere]

*Manufacturers of Commercial Refrigeration & Air Conditioning Heat Transfer Equipment*

FACTORY and OFFICES

Huntington Park, California

Phone 583-3187

# SPECIFICATIONS ELECTRIC DEFROST COILS

All Motors and Heaters Are 230 Volt Standard

Model	B.T.U. 1° T.D.	B.T.U. 10° T.D.	B.T.U. 15° T.D.	Motor Fan	C.F.M.	Liquid	Suction	Total Heater Watts
SLE-355	355	3550	5325	1	610	1/2	5/8	1500
SLE-710	710	7100	10650	2	1215	1/2	1 1/8	2000
SLE-1065	1065	10650	15975	3	1820	1/2	1 1/8	2600
SLE-1420	1420	14200	21300	4	2430	5/8	1 3/8	3500
SLE-1775	1775	17750	27625	5	3040	5/8	1 3/8	4100
SLE-2130	2130	21300	31950	6	3650	5/8	1 3/8	4100

All Models Require External Equalizer Valve, Except SL.355

Model	Dim. A	Dim. B	Dim. C	Dim. D	List Price
SLE-355	23"	14 1/2"	14"	15 3/4"	
SLE-710	39"	14 1/2"	14"	15 3/4"	
SLE-1065	56"	14 1/2"	14"	15 3/4"	
SLE-1420	72"	14 1/2"	14"	15 3/4"	
SLE-1775	90"	14 1/2"	14"	15 3/4"	
SLE-2130	107"	14 1/2"	14"	15 3/4"	

## MOUNTING DIMENSIONS

Model	No. Hangers	E	F	G
SLE-355	2	18"		
SLE-710	3	17 1/2"	34"	
SLE-1065	3	25 1/2"	51"	
SLE-1420	3	33 1/2"	67"	
SLE-1775	4	28 5/16"		85"
SLE-2130	4	34"		102"

