Cabinet Top External Evaporator (C TECHNICAL BULLETIN: CTE 112015 REV: F

# Quiet, Wine Cabinet Evaporator Air Defrost - 2,513 to 5,091 BTUH Capacity Application - External cooling unit for wine walls/cabinets, tobacco humidors or fur storage cabinets

LRC's Cabinet Top External (CTE) Evaporators are small units designed for medium to large size humidity controlled spaces such as wine cabinets/walls, fur cabinets and tobacco humidors. CTE units can be installed horizontally or vertically outside the cabinet to maximize storage capacity.

CTE Evaporators are available in capacities from 2,513 to 5,091 BTU/hour and can be used with R22, R134a, or R404a refrigerants. Chilled water models are available by special order.

- Very low noise
- Provides consistent room humidity by maintaining a steady coil temperature, reducing the need for expensive temperature and humidity controls in most applications.\* Contact LRC for more details.
- Extra insulation prevents sweating at higher ambient room temperatures
- Rust-proof aluminum housing with flat black powder coated finish. Other colors available.
- Thermally protected, PSC motorized impeller
- Constant pressure expansion valve standard
- High performance staggered coils with copper tubing mechanically expanded into aluminum fins
- Each unit pressure tested to eliminate leaks
- Factory wired for easy field installation

 Coil and drain pan dipped and baked with LRCCoat<sup>™</sup> anticorrosion coating

# Options Available– Call for details

- Copper coils and/or stainless steel cabinets available for special applications
- Chilled water coils available
- Pre-charged, custom or OEM units can be made to order

Our Application Engineers can help you design the system you need. Call us today, 562-944-1969, and we'll help you get the right LRC product for your project. CTE Units can be installed vertically or horizontally.

Extremely

Quiet

Unit

# **OUR UNCONDITIONAL GUARANTEE**

We're proud of the workmanship that goes into every LRC product. Because of our exacting design and manufacturing standards, and our thorough testing prior to shipping, we unconditionally guarantee our products to be free from manufacturing defects for one year. You can count on LRC Coil for quality heat transfer products.

# Visit www.LRCCoil.com for installation and maintenance data, and wiring diagrams.


At LRC, we are continuously working to improve our products, therefore, we reserve the right to make changes without notice.


\* = Assumes areas surrounding the humidity controlled room are maintained to ASHRAE conditions of 80°/67°. For humidity controlled rooms with different surrounding conditions, please contact LRC.

TECHNICAL BULLETIN: CTE 112015 REV: F

All measurements are in inches.

Our Application Engineers can help you design the system you need. Call us today, 562-944-1969, and we'll help you get the right LRC product for your project.

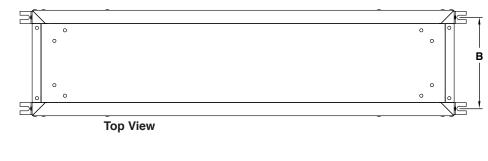

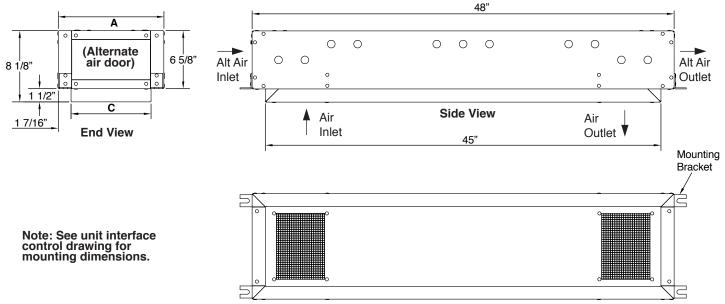

**Bottom View** 

Our website has a Wine Room Capacity Calculator that instantly determines room loads and capacities, enabling you to know cooling equipment requirements based on your exact specifications. Visit LRCCoil.com for details.

### CTE (Cabinet Top External Unit) Specifications

				Dimensions					BTUH Cap. @ 17° TD				
	Max			MPT								Unit	
Model No.	CFM	Amps	Motor	Α	В	С	Drain		Suct.	R22	R134a	R404a	Wt.
CTE-25	220	0.71	75W	12	10 <sup>3</sup> /8	9 <sup>1</sup> /8	<sup>1</sup> /2	<sup>3</sup> /8	3/8	2,577	2,513	2,543	34
CTE-35	260	0.71	75W	12	10 <sup>3</sup> /8	9 <sup>1</sup> /8	<sup>1</sup> /2	<sup>3</sup> /8	<sup>3</sup> /8	3,563	3,522	3,547	35
CTE-50	335	0.77	75W	24	22 <sup>3</sup> /8	21 <sup>1</sup> /8	<sup>1</sup> /2	<sup>3</sup> /8	<sup>1</sup> /2	5,091	5,032	5,076	63

Constant pressure expansion valve standard

#### Please note:

LRC cooling units are designed to minimize noise and vibration. To reduce/eliminate amplification of existing noise or vibration, extreme care must be taken during installation. Please refer to supplied installation instructions and use proper installation materials to minimize acoustic impact.

The use of oversized condensing units can lead to poor evaporator performance and possible system failure. When installing a LRC wine room evaporator, it is recommended that condensing units be sized LESS than or equal to the evaporator capacity. Contact LRC Coil's Application Engineers at 562-944-1969 for questions or assistance.

### *Visit www.LRCCoil.com for Installation and Maintenance Data and Wiring Diagrams.*



WARNING: The only harmful routes of exposure for this product is through linkation and impaction of this product. THIS PRODUCT IS NOT DESIGNED OR MEANT TO BE MIALED OR INCESTED. The only route of exposure that this product is meant for is dermal exposure (skin contact), the structure of the structure of the structure of the bits product is meant for is dermal exposure (skin contact), the structure of the structure of the structure of the bits and of the structure of the larm from dermal exposure to this product. For more information, go to wave, Prop65Warming c.a.gov,