


DIMENSIONS (INCHES)

MODEL	OVERALL LENGTH "A" DIM.	OVERALL HEIGHT "B" DIM.	OVERALL DEPTH "C" DIM.	DISTANCE BETWEEN HANGERS "D" DIM.	INLET CONNECTION	OUTLET CONNECTION	DRAIN CONNECTION
Q - 500, EQ - 500	47	7½	30	40	1/2"	5/8"	1/2" F.P.T.
Q - 750, EQ - 750	67	7½	30	60	1/2"	7/8"	1/2" F.P.T.
Q - 1000, EQ - 1000	86	7½	30	79	* 1/2"	7/8"	1/2" F.P.T.
Q - 1500, EQ - 1500	86	11	30	79	* 1/2"	7/8"	1/2" F.P.T.
Q - 2000, EQ - 2000	104	11	30	99	* 1/2"	1-1/8"	1/2" F.P.T.
Q - 2600, EQ - 2600	104	11	30	99	* 3/4"	1-3/8"	1/2" F.P.T.

* Use external equalizing valve.

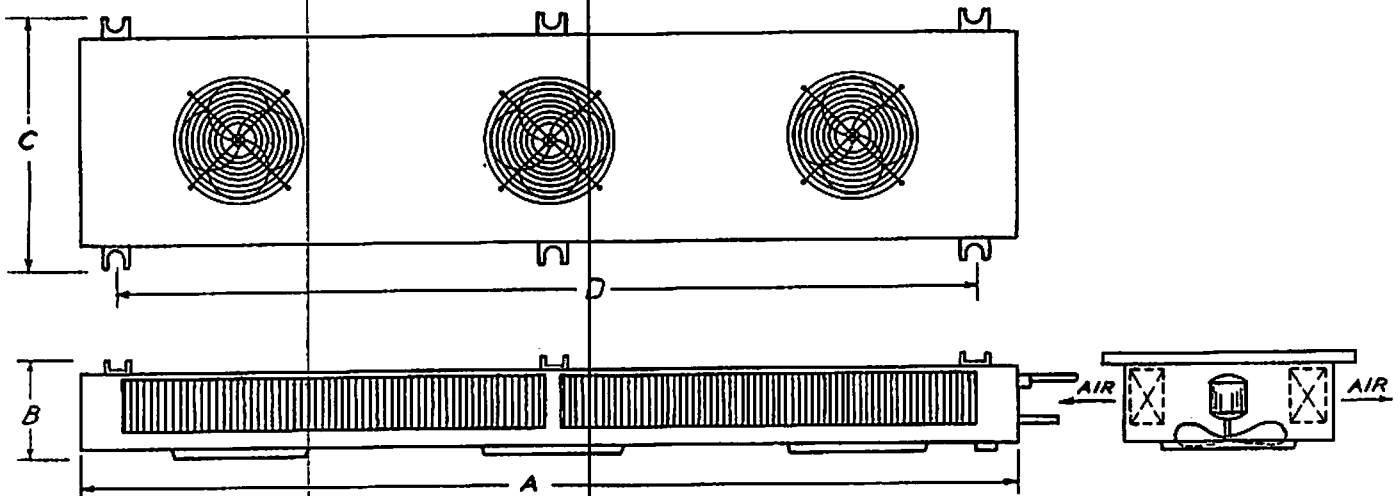

CAPACITY TABLE FOR MEAT CUTTING ROOM APPLICATION, BASED ON 55° F DB ROOM CONDITION AND 35° F SUCTION TEMPERATURE.

MODEL	BTU/HR. CAPACITY
Q - 500, EQ - 500	10000
Q - 750, EQ - 750	15000
Q - 1000, EQ - 1000	20000
Q - 1500, EQ - 1500	30000
Q - 2000, EQ - 2000	40000
Q - 2600, EQ - 2600	52000

L. R. Corporation [Lanphere]

Manufacturers of Commercial Refrigeration & Air Conditioning Heat Transfer Equipment

FACTORY and OFFICES

Huntington Park, California

Phone 583-3187