**Extremely** 

Quiet

Unit

**Quiet, Wine Cabinet Evaporator** 

Air Defrost - 2,513 to 5,091 BTUH Capacity Application - External cooling unit for wine walls/cabinets, tobacco humidors or fur storage cabinets

LRC's Cabinet Top External (CTE) Evaporators are small units designed for medium to large size humidity controlled spaces such as wine cabinets/walls, fur cabinets and tobacco humidors. CTE units can be installed horizontally or vertically outside the cabinet to maximize storage capacity.

CTE Evaporators are available in capacities from 2,513 to 5,091 BTU/hour and can be used with R22, R134a, or R404a refrigerants. Chilled water models are available by special order.

• Very low noise

• Provides consistent room humidity by maintaining a steady coil temperature, reducing the need for expensive temperature and humidity controls in most applications.\* Contact LRC for more details.

• Extra insulation prevents sweating at higher ambient room temperatures

- Rust-proof aluminum housing with flat black powder coated finish. Other colors available.
- Thermally protected, PSC motorized impeller
- Constant pressure expansion valve standard
- High performance staggered coils with copper tubing mechanically expanded into aluminum fins
- Each unit pressure tested to eliminate leaks
- Factory wired for easy field installation

baked with LRCCoat<sup>TM</sup> anticorrosion coating

## Options Available-Call for details

- Copper coils and/or stainless steel cabinets available for special applications
- units can be made to order

Our Application Engineers can help you design the system you need. Call us today, 562-944-1969, and we'll help you get the right LRC product for your project.

Coil and drain pan dipped and

## **OUR UNCONDITIONAL GUARANTEE**

CTE Units can be

installed vertically

or horizontally.

We're proud of the workmanship that goes into every LRC product. Because of our exacting design and manufacturing standards, and our thorough testing prior to shipping, we unconditionally guarantee our products to be free from manufacturing defects for one year. You can count on LRC Coil for quality heat transfer products.

## Visit www.LRCCoil.com for installation and maintenance data, and wiring diagrams.

At LRC, we are continuously working to improve our products, therefore, we reserve the right to make changes without notice.

© LRC Coil Company 2015

• Chilled water coils available • Pre-charged, custom or OEM

\* = Assumes areas surrounding the humidity controlled room are maintained to ASHRAE conditions of 80°/67°. For humidity controlled rooms with different surrounding conditions, please contact LRC.

# Cabinet Top External Evaporator (CTE-EC)


COIL COMPANY


**TECHNICAL BULLETIN: CTE 112015 REV: F** 


PAGE 2

All measurements are in inches.


Our Application Engineers can help you design the system you need. Call us today, 562-944-1969, and we'll help you get the right LRC product for your project.

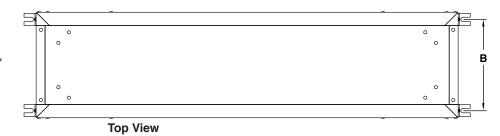



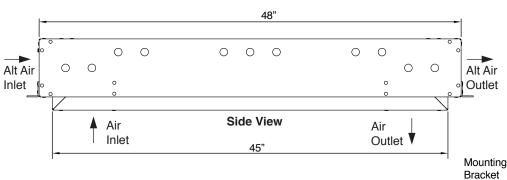

Note: See unit interface control drawing for mounting dimensions.

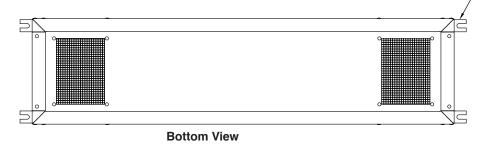

Our website has a Wine Room Capacity Calculator that instantly determines room loads and capacities, enabling you to know cooling equipment requirements based on your exact specifications. Visit LRCCoil.com for details.

#### CTE (Cabinet Top External Unit) Specifications

or = (outside rop = storium ormy opcomountorio													
				Dimensions						BTUH Cap. @ 17° TD			
	Max			MPT					38° SST, 55° Room			Unit	
Model No.	CFM	Amps	Motor	Α	В	С	Drain	Liq.	Suct.	R22	R134a	R404a	Wt.
CTE-25EC	220	0.71	75W	12	10 <sup>3</sup> /8	9 <sup>1</sup> / <sub>8</sub>	1/2	<sup>3</sup> /8	3/8	2,577	2,513	2,543	34
CTE-35EC	260	0.71	75W	12	10 <sup>3</sup> /8	9 <sup>1</sup> / <sub>8</sub>	1/2	<sup>3</sup> / <sub>8</sub>	3/8	3,563	3,522	3,547	35
CTE-50EC	335	0.77	75W	24	22 <sup>3</sup> / <sub>8</sub>	21 <sup>1</sup> / <sub>8</sub>	1/2	3/8	1/2	5,091	5,032	5,076	63

EC motor standard. Constant pressure expansion valve standard

### Please note:

LRC cooling units are designed to minimize noise and vibration. To reduce/eliminate amplification of existing noise or vibration, extreme care must be taken during installation. Please refer to supplied installation instructions and use proper installation materials to minimize acoustic impact. The use of oversized condensing units can lead to poor evaporator performance and possible system failure. When installing a LRC wine room evaporator, it is recommended that condensing units be sized LESS than or equal to the evaporator capacity. Contact LRC Coil's Application Engineers at 562-944-1969 for questions or assistance.

Visit www.LRCCoil.com for Installation and Maintenance Data and Wiring Diagrams.



WARNING: The only harmful routes of exposure for this product is through inhalation and ingestion of this product. THIS PRODUCT IS NOT DESIGNED OR MEANT TO BE INHALED OR INGESTED. The only route of exposure that this product is meant for is dermal exposure (slat contact). Communes face as significant rists to chemicals that are known of the contact in the product of the contact in the product of the contact in the product is meant for is derived harm from dermal exposure to this product. For more information, no to over Proceedings and contact in the cont