


Air Defrost

- Low in Height
- Heavy gauge textured aluminum
- Easy to remove drain pan
- Mounts flush to ceiling
- Rust proof
- Molded fan guards and fan blades
- 115/230 VAC models available
- Custom coil coatings, OEM and stainless steel housing available

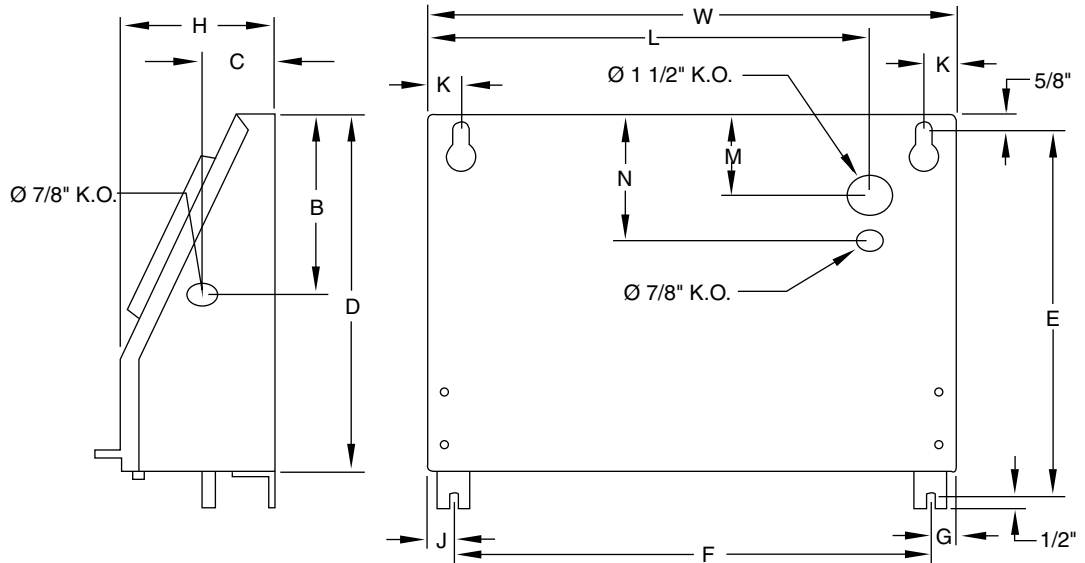

Low Profile Reach In Unit Cooler (LP) Specifications

| Model Number | BTUH 10° T.D. | CFM | Motor Qty. | Amps @ 115V | Amps @ 230V | Fan | Connection Size (In) | | | Unit Wt. |
|--------------|------------------|-----|------------|----------------|----------------|-----|----------------------|--------|--------|----------|
| | | | | | | | Suct. | Liq. | Drain | |
| LP10 | 1000 | 150 | 1 | 0.73 | 0.37 | 6" | 3/8 OD | 1/2 OD | 1/2 OD | 15 |
| LP13 | 1300 | 180 | 1 | 0.73 | 0.37 | 6" | 3/8 OD | 1/2 OD | 1/2 OD | 18 |
| LP18 | 1800 | 300 | 2 | 1.50 | 0.75 | 6" | 3/8 OD | 1/2 OD | 1/2 OD | 22 |
| LP23 | 2300 | 350 | 2 | 1.50 | 0.75 | 6" | 1/2 OD | 1/2 OD | 1/2 OD | 29 |
| LP30 | 3000 | 500 | 3 | 2.20 | 1.10 | 6" | 1/2 OD | 1/2 OD | 1/2 OD | 37 |
| LP40 | 4000 | 600 | 4 | 2.90 | 1.50 | 6" | 1/2 OD | 1/2 OD | 1/2 OD | 45 |
| LP53 | 5300 | 750 | 5 | 3.70 | 1.90 | 6" | 1/2 OD | 1/2 OD | 1/2 OD | 61 |

Capacities shown at +25° ST

| Model Number | Dimensions in Inches | | | | | | | | | | | | |
|--------------|----------------------|--------|-------|-------|-------|--------|--------|---|---|--------|-------|---|-------|
| | W | D | H | B | C | E | F | G | J | K | L | M | N |
| LP10 | 16 3/4 | 13 3/4 | 4 3/4 | 5 1/2 | 2 | 13 3/4 | 14 3/4 | 1 | 1 | 1 1/16 | 2 3/4 | 3 | 4 3/4 |
| LP13 | 20 3/4 | 13 3/4 | 4 3/4 | 5 1/2 | 2 | 13 3/4 | 18 3/4 | 1 | 1 | 1 1/16 | 2 3/4 | 3 | 4 3/4 |
| LP18 | 24 1/4 | 14 3/4 | 4 3/4 | 6 1/4 | 2 1/8 | 14 3/4 | 22 1/4 | 1 | 1 | 1 1/16 | 2 3/4 | 3 | 4 3/4 |
| LP23 | 31 3/4 | 14 3/4 | 4 3/4 | 6 1/4 | 2 1/8 | 14 3/4 | 29 3/4 | 1 | 1 | 1 1/16 | 2 3/4 | 3 | 4 3/4 |
| LP30 | 40 1/4 | 14 3/4 | 4 3/4 | 6 1/4 | 2 1/8 | 14 3/4 | 38 1/4 | 1 | 1 | 1 1/16 | 2 3/4 | 3 | 4 3/4 |
| LP40 | 53 3/4 | 14 3/4 | 4 3/4 | 6 1/4 | 2 1/8 | 14 3/4 | 51 3/4 | 1 | 1 | 1 1/16 | 2 3/4 | 3 | 4 3/4 |
| LP53 | 53 3/4 | 14 3/4 | 6 3/4 | 6 1/4 | 2 1/8 | 14 3/4 | 51 3/4 | 1 | 1 | 1 1/16 | 2 3/4 | 3 | 4 3/4 |