


Electric Defrost

- Low in Height
- Heavy gauge textured aluminum
- Easy to remove drain pan
- Mounts flush to ceiling
- Rust proof
- Molded fan guards and fan blades
- 115/230 VAC models available
- Custom coil coatings, OEM and stainless steel housing available
- Electric defrost models have heaters with built in fan delay
- Hot gas defrost available, consult factory

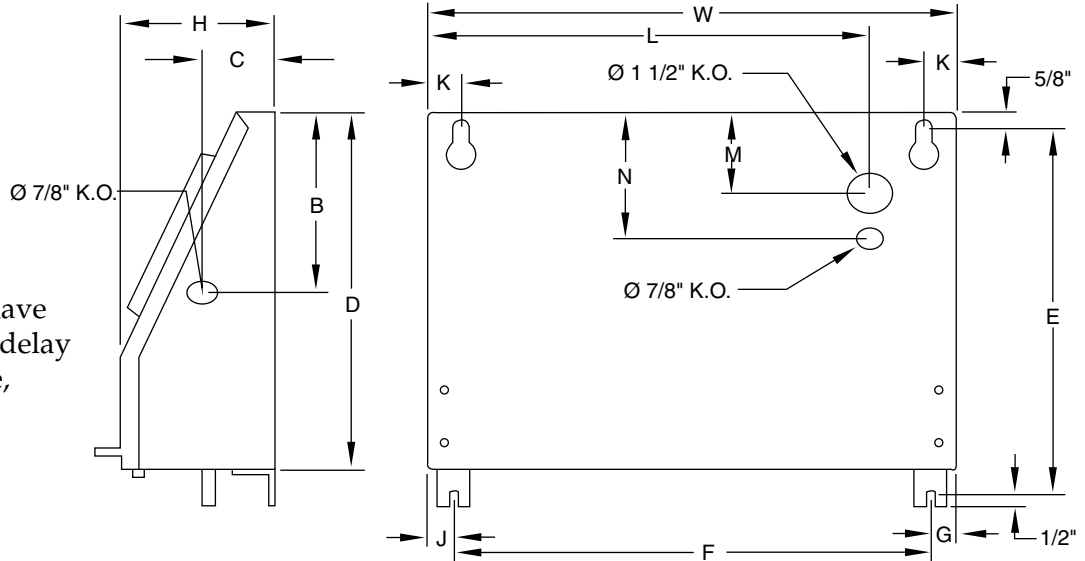

Low Profile Reach In Unit Cooler (LP) Specifications

Model Number	BTUH 10° T.D.	CFM	Motor Qty.	Amps @ 115V	Amps @ 230V	Fan	Heater Amps @ 115V	Heater Amps @ 230V	Heater Watts	Connection Size (In)			Unit Wt.
										Suct.	Liq.	Drain	
LPE9	900	150	1	0.73	0.37	6"	3.5	1.75	400	3/8 OD	1/2 OD	1/2 OD	16
LPE12	1200	210	2	1.50	0.73	6"	4.4	2.2	500	3/8 OD	1/2 OD	1/2 OD	19
LPE16	1600	300	2	1.50	0.73	6"	6.1	3.1	700	3/8 OD	1/2 OD	1/2 OD	23
LPE22	2200	450	2	2.60	1.30	8"	6.1	3.1	700	1/2 OD	1/2 OD	1/2 OD	31
LPE29	2900	500	2	2.60	1.30	8"	7.8	3.9	900	1/2 OD	1/2 OD	1/2 OD	39
LPE36	3600	750	3	3.90	1.95	8"	10.4	5.2	1200	5/8 OD	1/2 OD	1/2 OD	48
LPE58	5800	950	4	5.20	2.60	8"	13	6.5	1500	5/8 OD	1/2 OD	1/2 OD	70
LPE70	7000	1150	5	6.50	3.25	8"	20	10	2300	5/8 OD	1/2 OD	1/2 OD	105

Capacities shown at -10° FST

Model Number	Dimensions in Inches												
	W	D	H	B	C	E	F	G	J	K	L	M	N
LPE9	16 3/4	13 3/4	4 3/4	4 1/4	7/8	13 3/4	14 3/4	1	1	1	2 3/4	3	4 3/4
LPE12	20 3/4	13 3/4	4 3/4	4 1/4	7/8	13 3/4	18 3/4	1	1	1	9 1/2	3	4 3/4
LPE16	24 1/4	14 3/4	4 3/4	4 1/4	7/8	14 3/4	22 1/4	1	1	1	12	3	4 3/4
LPE22	34 1/4	15 3/4	6 3/4	4 1/4	7/8	15 3/4	22 1/4	1	1	1	12	3	4 3/4
LPE29	31 3/4	15 3/4	6 3/4	4 1/4	7/8	15 3/4	29 3/4	1	1	1	3	2	3 3/4
LPE36	38 3/4	15 3/4	6 3/4	4 1/4	7/8	15 3/4	36 3/4	1	1	1	3	2	3 3/4
LPE58	48 3/4	16 3/4	6 3/4	4 1/4	7/8	16 3/4	46 3/4	1	1	1	3	2	3 3/4
LPE70	58 3/4	16 3/4	6 3/4	4 1/4	7/8	16 3/4	56 3/4	1	1	1	3	2	3 3/4