CONTROL WIRE FOR 3 SPEED OPERATION

DO NOT CONNECT FOR STANDARD WINE ROOM APPLICATION

C-NC
SPEED 1 DEFAULT SPEED
CONTROL (NOT CONNECTED) RED
PHASE (L1) BLACK
NEUTRAL WHITE
110 V

C-N
SPEED 2
CONTROL RED
PHASE (L1) BLACK
NEUTRAL WHITE
110 V
(MOTOR ON SPEED WILL RUN IN REVERSE - FOR OPPOSITE DIRECTION AIRFLOW)*

C-P
SPEED 3
CONTROL RED
PHASE (L1) BLACK
NEUTRAL WHITE
110 V

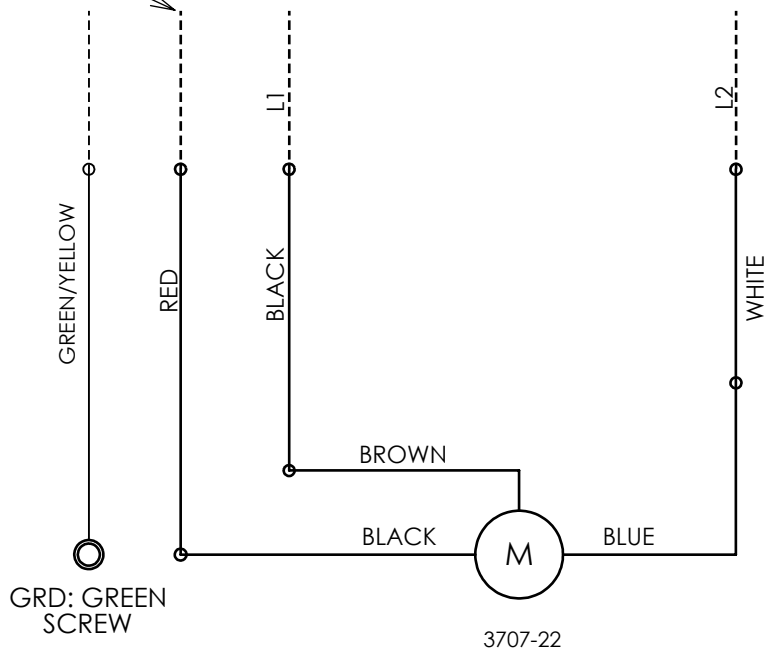

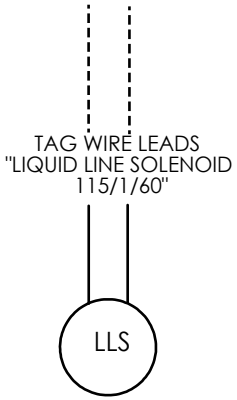

LEGEND

M1 = MOTORS 1,2 .....
GRD = GROUND
FACTORY WIRING ————————
FIELD WIRING - - - - - - - - - - - - -

1. **USE COPPER CONDUCTORS ONLY.**
2. **UNIT MUST GROUNDED.**
3. **FOR MOTOR AMPS SEE RATING STICKER ON OUTSIDE OF UNIT.**
4. ***WHEN REVERSING MOTOR ROTATION FLIP FAN BLADE OVER FOR OPPOSITE DIRECTION AIRFLOW.**

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS + DECIMALS .XX+ .XXX .XXX+.XXX ANGLES + 1
MATERIAL XX
FINISH --
DO NOT SCALE DRAWING

CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE

APPROVALS	DATE
DRAWN SV	3/26/14
CHECKED	
RESP ENG	
MFG ENG	
QUAL ENG	

LRC COIL CO.

WIRING DIAGRAM
DQ UNITS

SIZE A | DWG. NO. ES-DQ_WITH REVERSE OPTION | REV. A
SCALE | CAD FILE: | SHEET OF

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LRC COIL CO. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF LRC COIL CO. IS PROHIBITED.