

CONTROL WIRE
FOR 3 SPEED
OPERATION


DO NOT CONNECT
FOR STANDARD
WINE ROOM
APPLICATION

**NOTE: UP TO SIX MOTORS
CAN BE CONNECTED IN
PARALLEL**


LEGEND

M1 = MOTORS 1,2 ...
GRD = GROUND

FACTORY WIRING ———
FIELD WIRING - - - - -

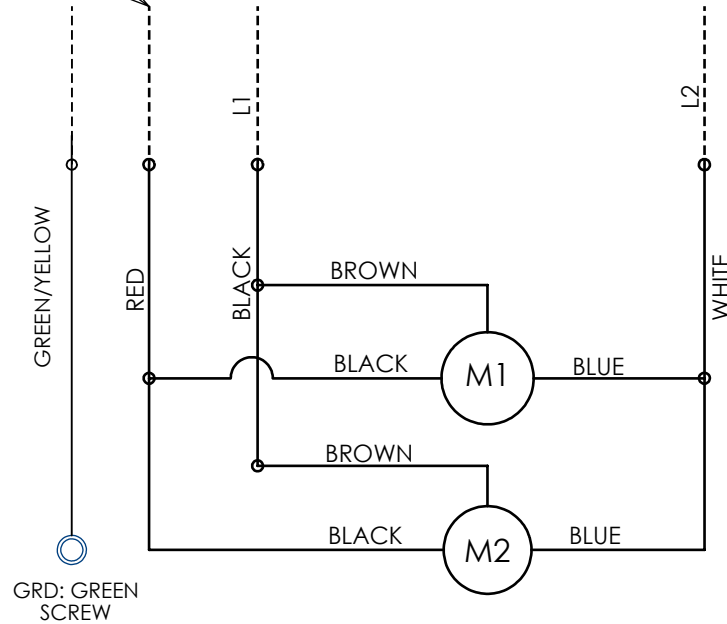

TAG WIRE LEADS
"LIQUID LINE SOLENOID
115/1/60"



C-NC SPEED 1 DEFAULT SPEED

CONTROL (NOT CONNECTED) RED — x
PHASE (L1) BLACK ——— 110 V
NEUTRAL WHITE ———

C-N SPEED 2

CONTROL RED ———
PHASE (L1) BLACK ——— 110 V
NEUTRAL WHITE ———
(REVERSE AIRFLOW)

C-P SPEED 3

CONTROL RED ———
PHASE (L1) BLACK ——— 110 V
NEUTRAL WHITE ———

1. USE COPPER CONDUCTORS ONLY
2. UNIT MUST GROUNDED
3. FOR MOTOR AMPS SEE RATING STICKER ON OUTSIDE OF UNIT.
4. WHEN REVERSING MOTOR ROTATION FLIP FAN BLADE OVER FOR OPPOSITE DIRECTION AIRFLOW.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
+ .XX+ .XX + 1
.XXX+.XXX

CAD GENERATED DRAWING,
DO NOT MANUALLY UPDATE

APPROVALS DATE
DRAWN SV 3/26/14
CHECKED

RESP ENG

MFG ENG

QUAL ENG

THE LEGACY CO.

WIRING DIAGRAM
SLPA -- Q UNITS

SIZE DWG. NO. REV.
A ES-SLPA - Q_WITH REVERSE OPTION A
SCALE CAD FILE: SHEET OF

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
LRC COIL CO. ANY REPRODUCTION IN PART OR WHOLE WITHOUT
THE WRITTEN PERMISSION OF LRC COIL CO. IS PROHIBITED.