


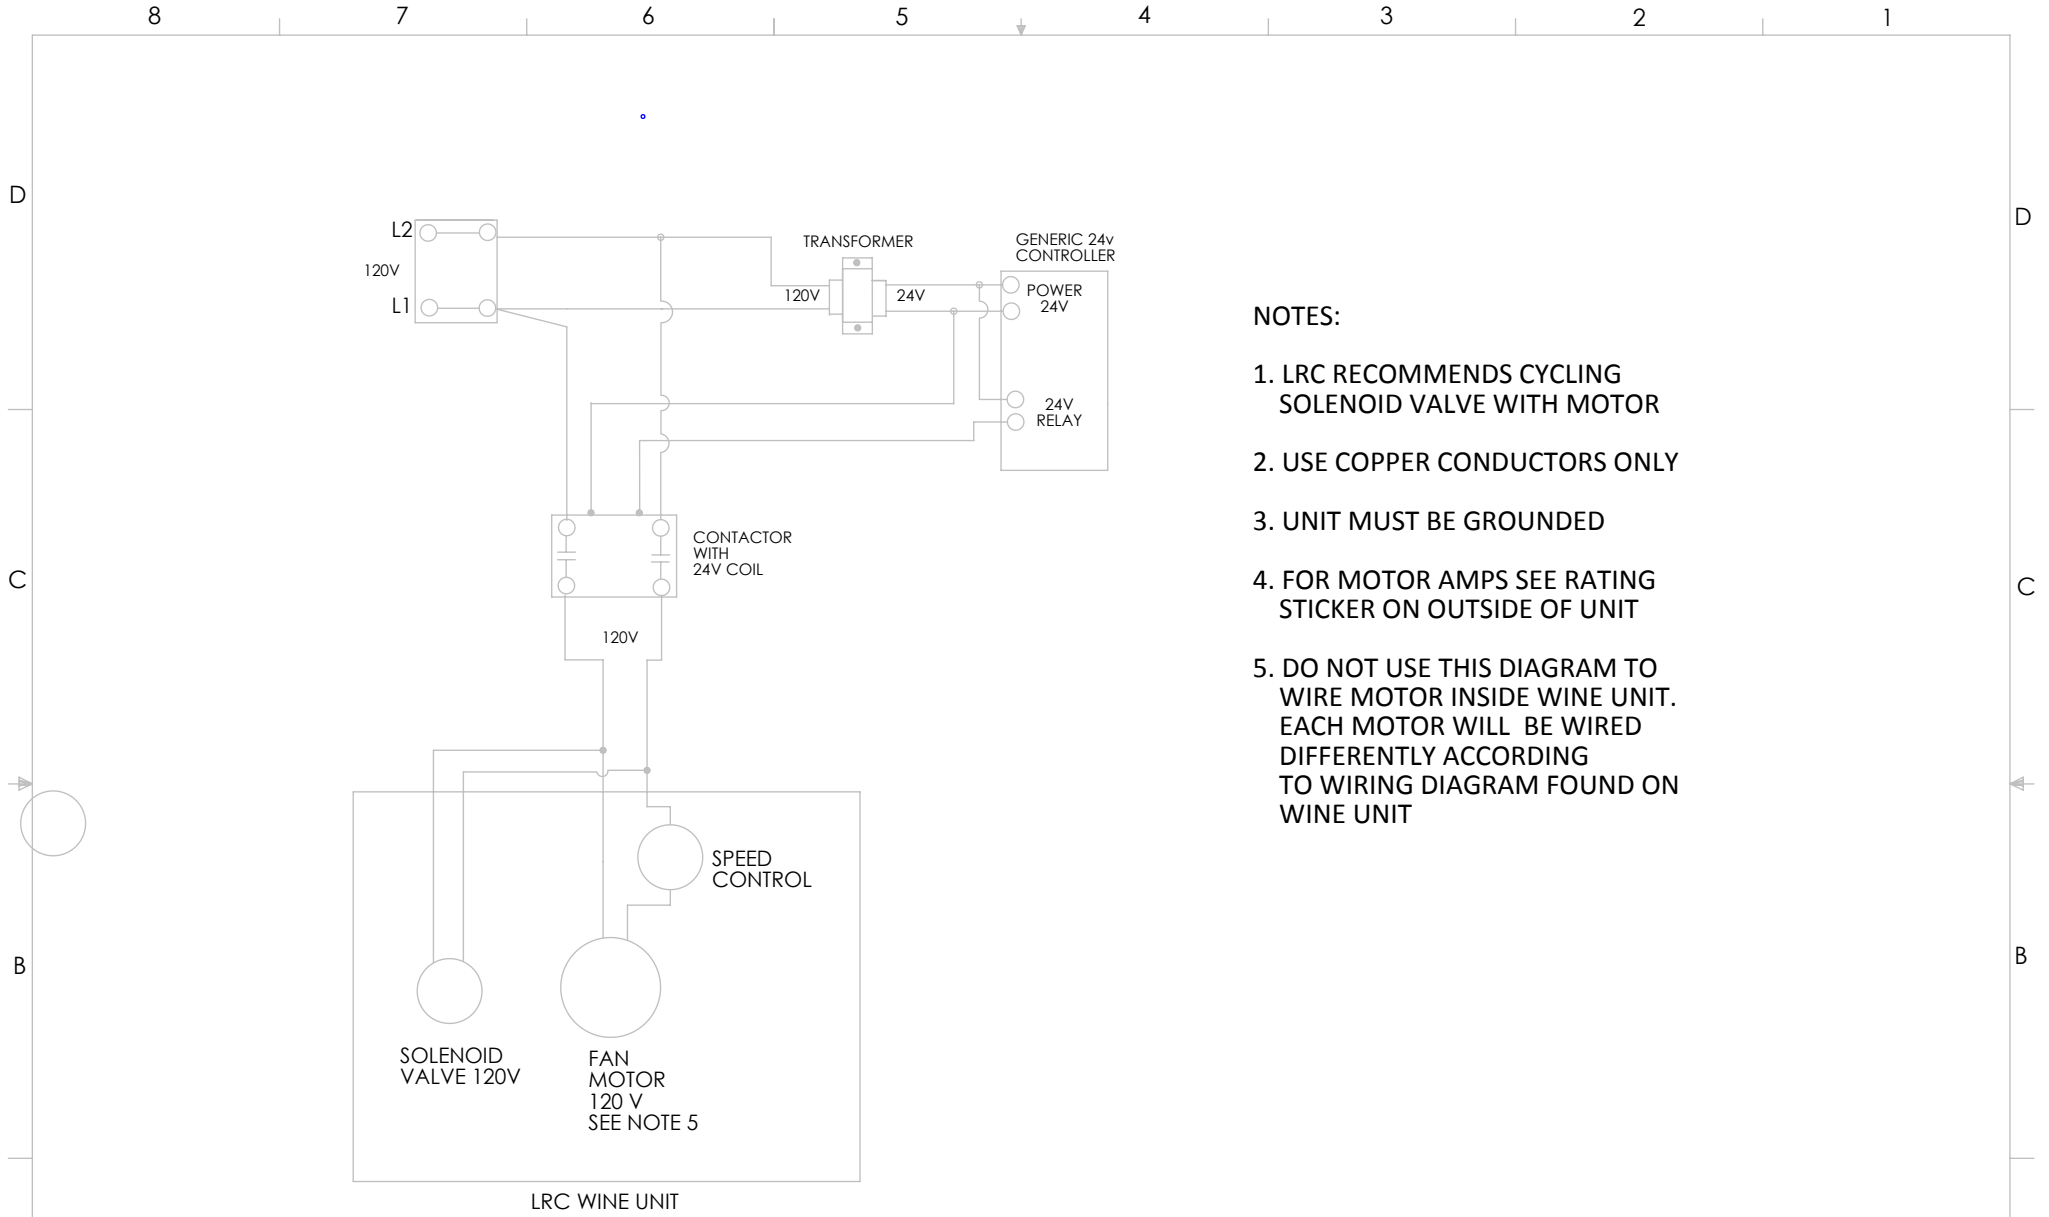

- NOTES:
- 1. LRC RECOMMENDS CYCLING SOLENOID VALVE WITH MOTOR
 - 2. USE COPPER CONDUCTORS ONLY
 - 3. UNIT MUST BE GROUNDED
 - 4. FOR MOTOR AMPS SEE RATING STICKER ON OUTSIDE OF UNIT
 - 5. DO NOT USE THIS DIAGRAM TO WIRE MOTOR INSIDE WINE UNIT. EACH MOTOR WILL BE WIRED DIFFERENTLY ACCORDING TO WIRING DIAGRAM FOUND ON WINE UNIT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES + .XX+ .XX + 1 .XXX+.XXX MATERIAL XX FINISH -- DO NOT SCALE DRAWING		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		LRC COIL CO.	
		APPROVALS	DATE		
		DRAWN	GA	4/13/2012	WINE ROOM EVAPORATOR WIRING DIAGRAM FOR PUMP DOWN SYSTEM USING 24V CONTROLLER
		CHECKED			
RESP ENG			MFG ENG	QUAL ENG	
NEXT ASSY		USED ON			
APPLICATION		SCALE		DWG. NO. WINE EVAP WIRE REV. A	
		CAD FILE:		SHEET OF	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LRC COIL CO. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF LRC COIL CO. IS PROHIBITED.