


SEE RATING STICKER FOR HEATER AND MOTOR VOLTAGE AND AMPS

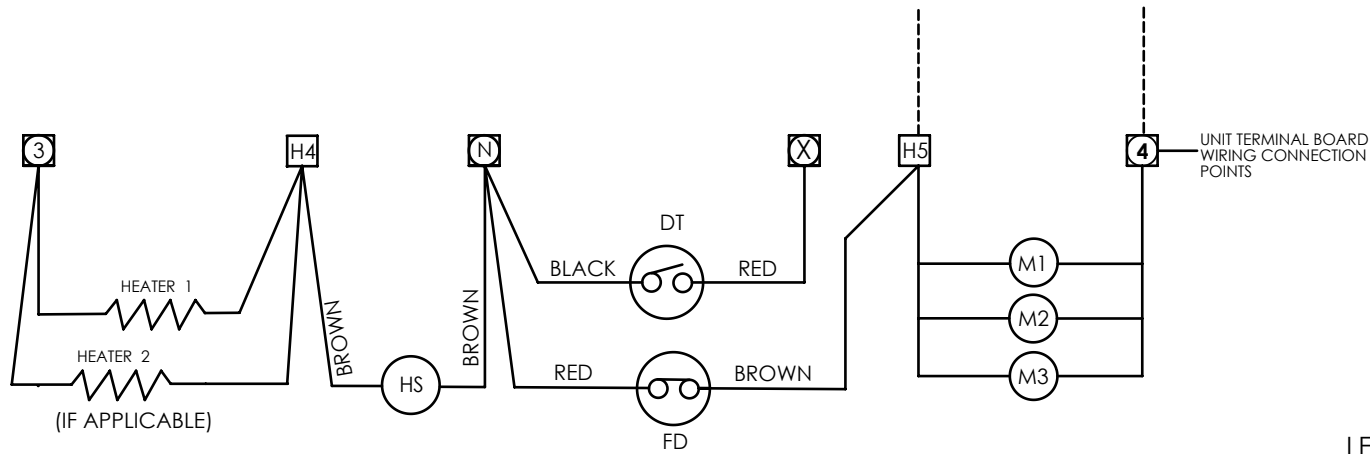

LEGEND

HS = HEATER SAFETY
DT = DEFROST TERMINATION
FD = FAN DELAY
M1 = MOTORS 1,2,3...
GRD = GROUND

FACTORY WIRING _____
FIELD WIRING -----

REHEAT CUSTOMER
CONNECTED

2. UNIT MUST GROUND
3. FOR MOTOR AMPS SEE RATING
STICKER ON OUTSIDE OF UNIT.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES + .XX+ .XX + 1 .XXX+.XXX			CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		LRC COIL CO.			
MATERIAL XX			APPROVALS		DATE			
			DRAWN BJ		9/7/2005			
FINISH --			CHECKED		WIRING DIAGRAM FOR SLE & SLPE UNIT 115V/60/1 WITH DRAIN PAN HEATER			
			RESP ENG					
DO NOT SCALE DRAWING			MFG ENG		SIZE A		DWG. NO. 15194-07	REV A
			QUAL ENG		SCALE		CAD FILE:	SHEET

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
LRC COIL CO. ANY REPRODUCTION IN PART OR WHOLE WITHOUT
THE WRITTEN PERMISSION OF LRC COIL CO. IS PROHIBITED.