


SEE RATING STICKER FOR HEATER AND MOTOR VOLTAGE AND AMPS

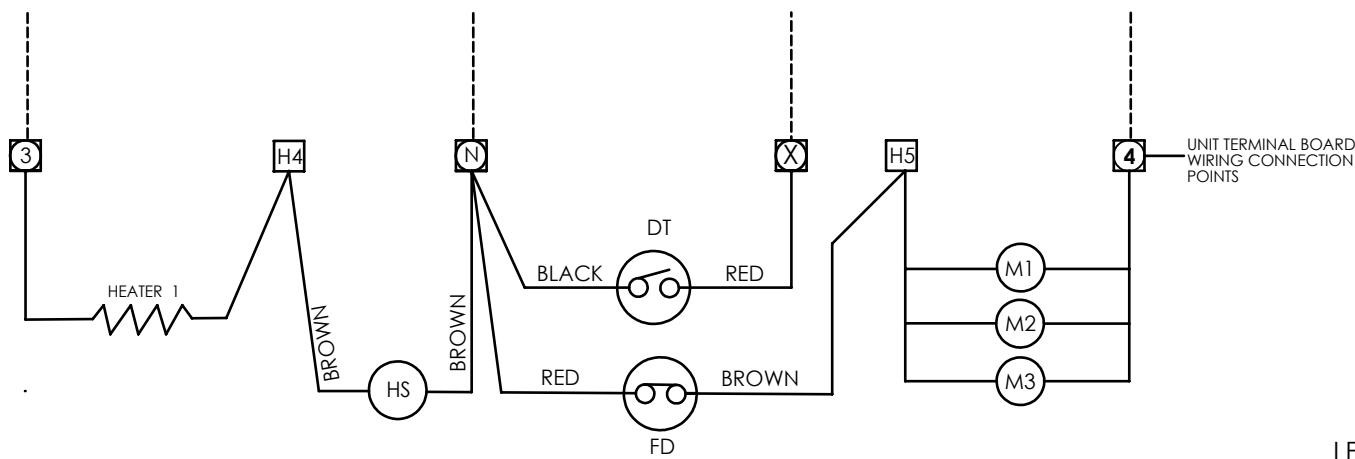

LEGEND

HS = HEATER SAFETY
DT = DEFROST TERMINATION
FD = FAN DELAY
M1 = MOTORS 1,2,3...
GRD = GROUND

FACTORY WIRING —————
FIELD WIRING - - - - -



HEATER 2



HEATER 3 230V,900W
DRAIN PAN HEATER

REHEAT CUSTOMER
CONNECTED

	VOLTS	HP	PH	TOTAL FLA	MAX FUSE
FAN	230	1.1	1	3.3	15A
HEATER	230		1	12.2	

2. UNIT MUST GROUND
3. FOR MOTOR AMPS SEE RATING
STICKER ON OUTSIDE OF UNIT.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES + .XX+ .XX + 1 .XXX+.XXX		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
		APPROVALS	DATE
		DRAWN BJ	9/7/2005
		CHECKED	
MATERIAL XX		RESP ENG	
FINISH --		MFG ENG	
DO NOT SCALE DRAWING		QUAL ENG	

LRC COIL CO.

WIRING DIAGRAM FOR
SLE & SLPE UNIT
230V/60/1
WITH DRAIN PAN HEATER

SIZE A	DWG. NO.	REV A
SCALE	CAD FILE:	SHEET OF

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
LRC COIL CO. ANY REPRODUCTION IN PART OR WHOLE WITHOUT
THE WRITTEN PERMISSION OF LRC COIL CO. IS PROHIBITED.