


SEE RATING STICKER FOR HEATER AND MOTOR VOLTAGE AND AMPS

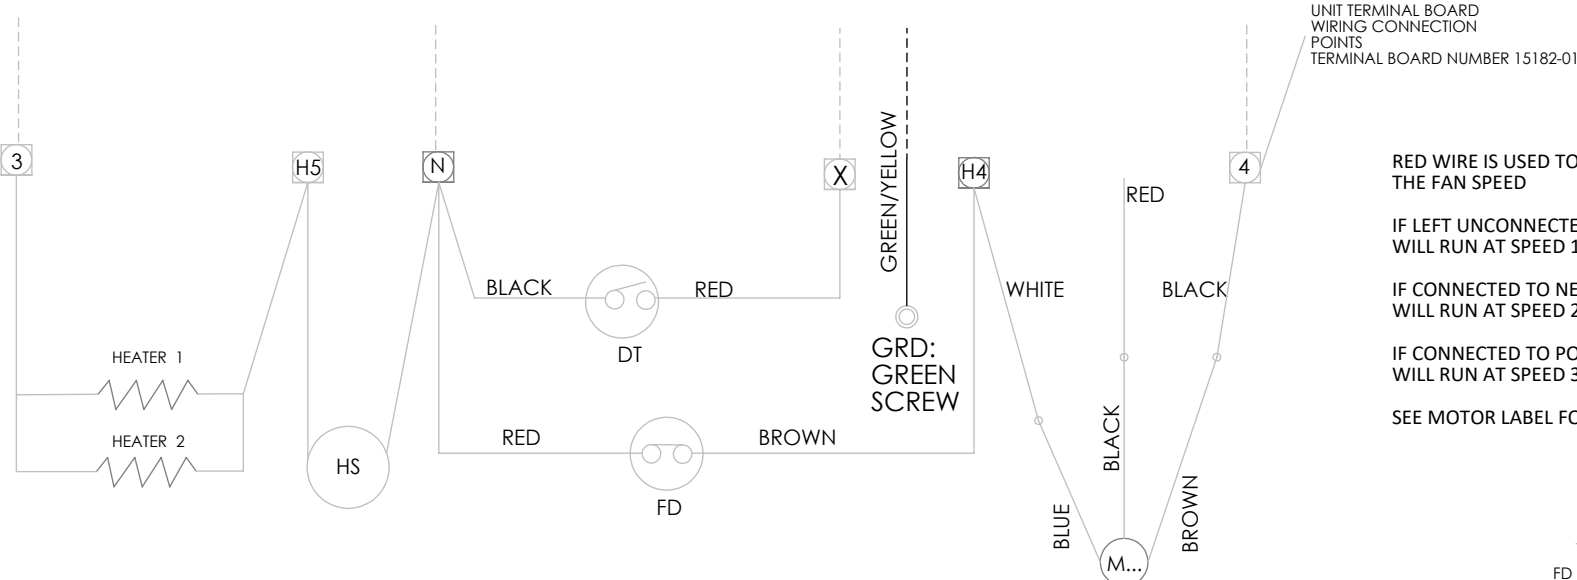

RED WIRE IS USED TO CONTROL THE FAN SPEED

IF LEFT UNCONNECTED MOTOR WILL RUN AT SPEED 1

IF CONNECTED TO NEUTRAL MOTOR WILL RUN AT SPEED 2

IF CONNECTED TO POWER MOTOR WILL RUN AT SPEED 3


SEE MOTOR LABEL FOR AVAILABLE SPEEDS

LEGEND

FD = FAN DELAY 2306
DT = DEFROST TERMINATION 2305

M1 = 230V MOTORS 1,2,3... 3708
GRD = GROUND
HS = HEATER SAFETY 2167

————— FACTORY WIRING
----- FIELD WIRING

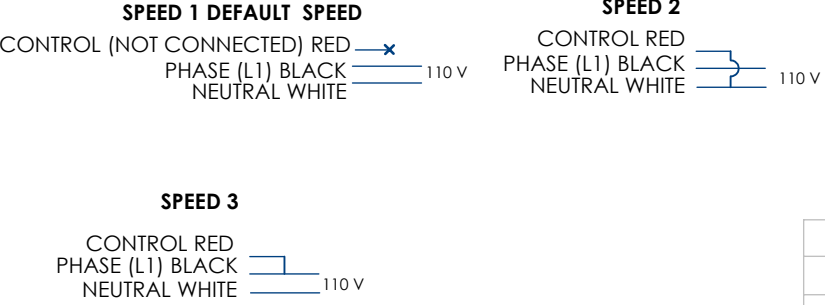

- 1. USE COPPER CONDUCTORS ONLY
- 2. UNIT MUST GROUND
- 3. FOR MOTOR AMPS SEE RATING STICKER ON OUTSIDE OF UNIT.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES + .XX+ .XX + 1 .XXX+.XXX		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
		APPROVALS	DATE
DRAWN HT		6/6/2014	
CHECKED			
MATERIAL XX		RESP ENG	
FINISH --		MFG ENG	
DO NOT SCALE DRAWING		QUAL ENG	
NEXT ASSY USED ON		SCALE	
APPLICATION		DWG. NO.	
		ES-SLPE	
		REV. A	
		SHEET OF	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LRC COIL CO. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF LRC COIL CO. IS PROHIBITED.