


# SLIM LINE COILS

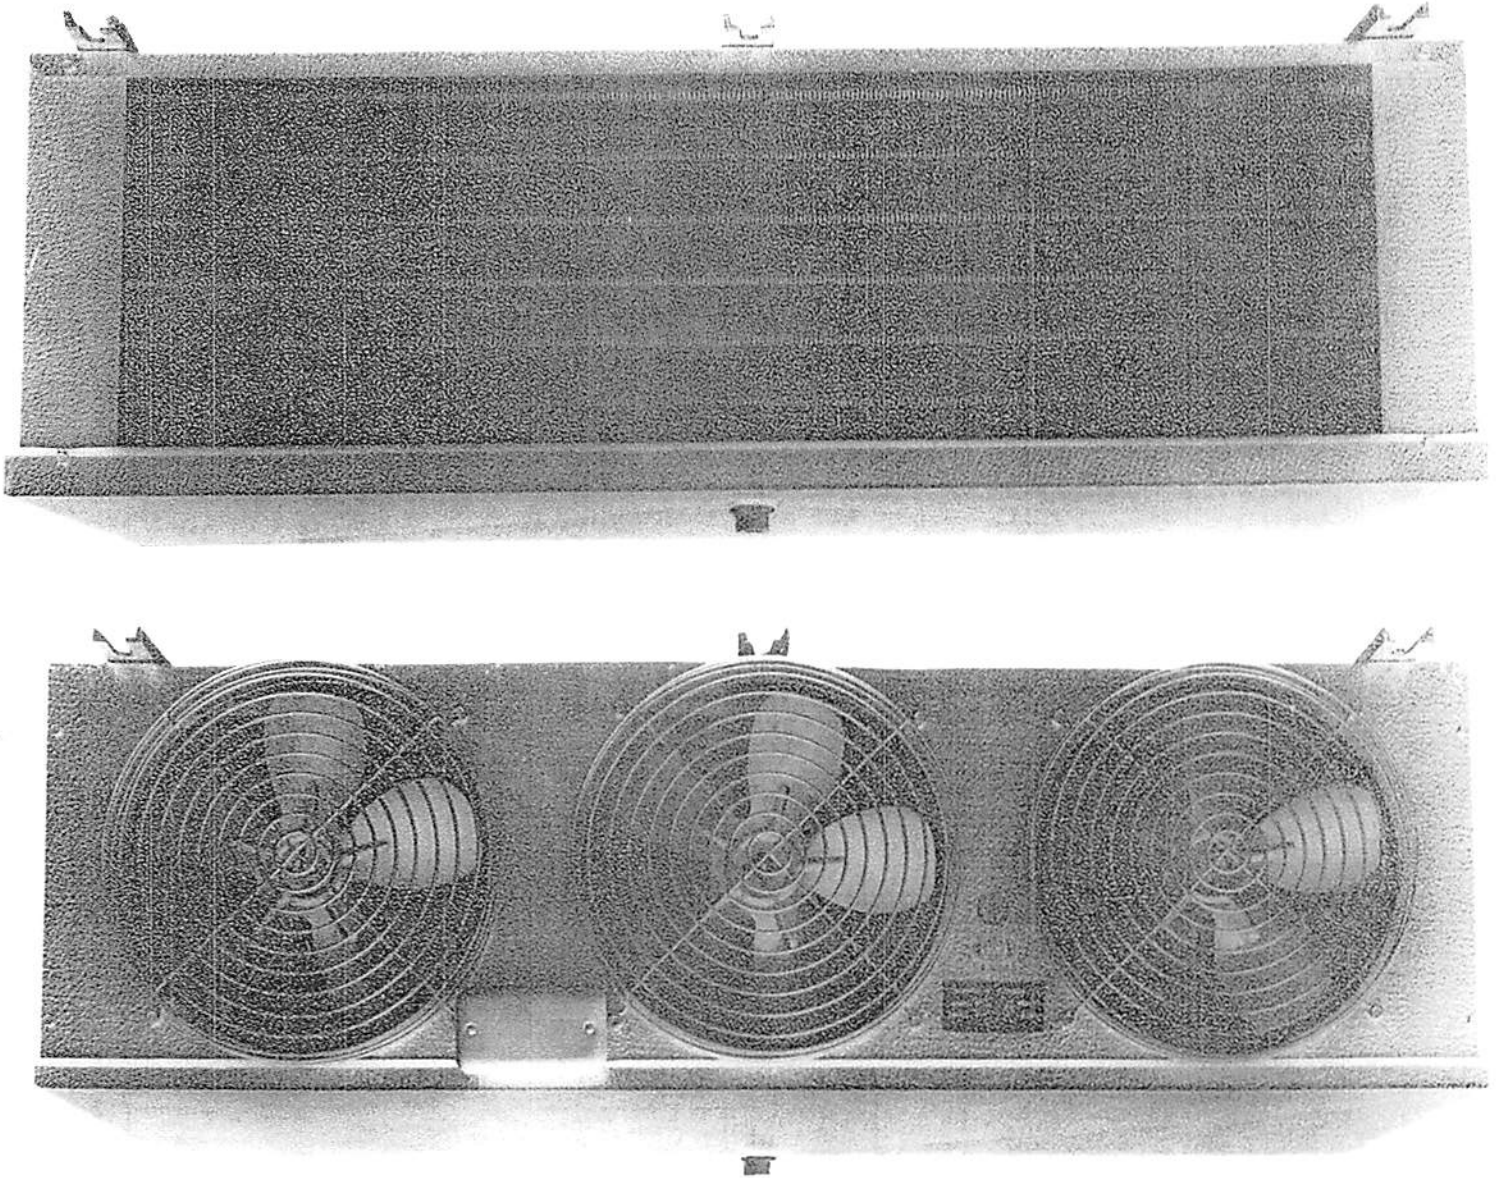

- ★ Stucco Aluminum Housing.
- ★ Heavy Duty Motors with overload protection.
- ★ Staggered Tube Pattern for better operation.

**L. R. Corporation** [Lanphere]

*Manufacturers of Commercial Refrigeration & Air Conditioning Heat Transfer Equipment*

FACTORY and OFFICES

Huntington Park, California

Phone 583-3187

## Capacities B.T.U. Rating for Above 33° F

Model	B.T.U. 1° T.D.	B.T.U. 10° T.D.	B.T.U. 15° T.D.	Motor Fan	C.F.M.	Liquid	Suction
SL-510	510	5100	7650	1	560	1/2	5/8
SL-1020	1020	10200	15300	2	1140	1/2	7/8
SL-1530	1530	15300	22950	3	1690	1/2	7/8
SL-2040	2040	20400	30600	4	2280	1/2	1 1/8
SL-2550	2550	25550	38250	5	2840	1/2	1 1/8
SL-3060	3060	30600	45900	6	3410	5/8	1 3/8

### All Models Require External Equalizer Valve, Except SL-510

Model	Dim. A	Dim. B	Dim. C	Dim. D
SL-510	23"	14 1/2"	14"	15 3/4"
SL-1020	39"	14 1/2"	14"	15 3/4"
SL-1530	56"	14 1/2"	14"	15 3/4"
SL-2040	72"	14 1/2"	14"	15 3/4"
SL-2550	90"	14 1/2"	14"	15 3/4"
SL-3060	107"	14 1/2"	14"	15 3/4"

#### MOUNTING DIMENSIONS

Model	No. Hangers	E	F	G
SL-510	2	18"		
SL-1020	3	17 1/2"	34"	
SL-1530	3	25 1/2"	51"	
SL-2040	3	33 1/2"	67"	
SL-2550	4	28 5/16"		85"
SL-3060	4	34"		102"

